
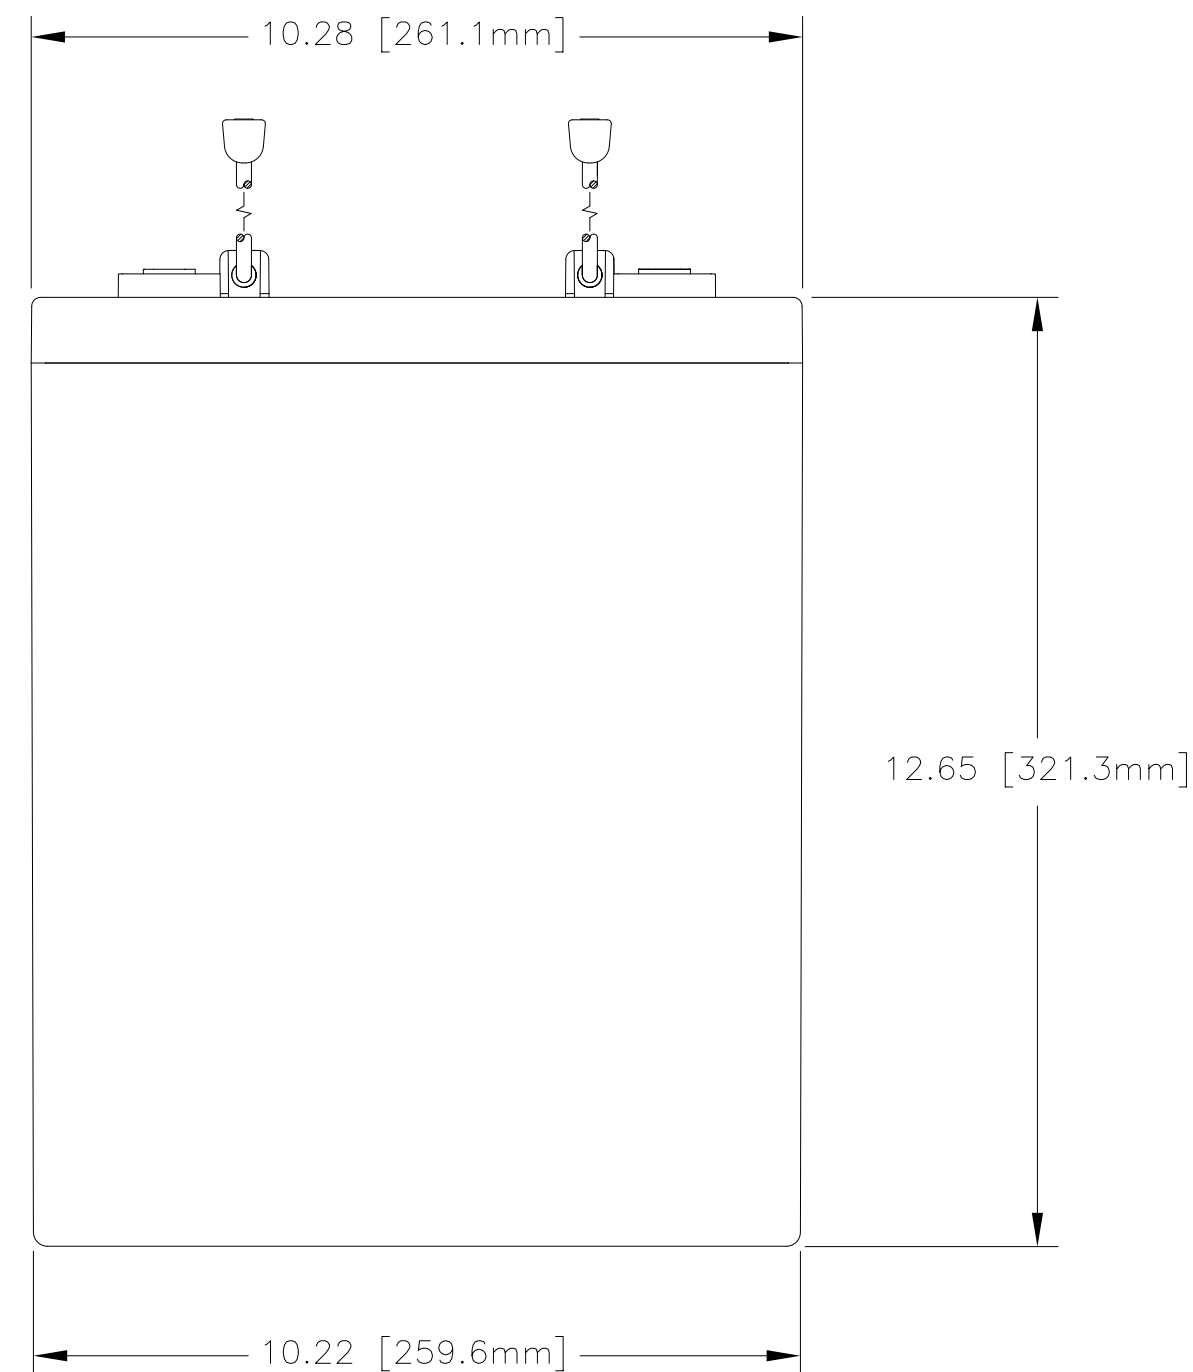
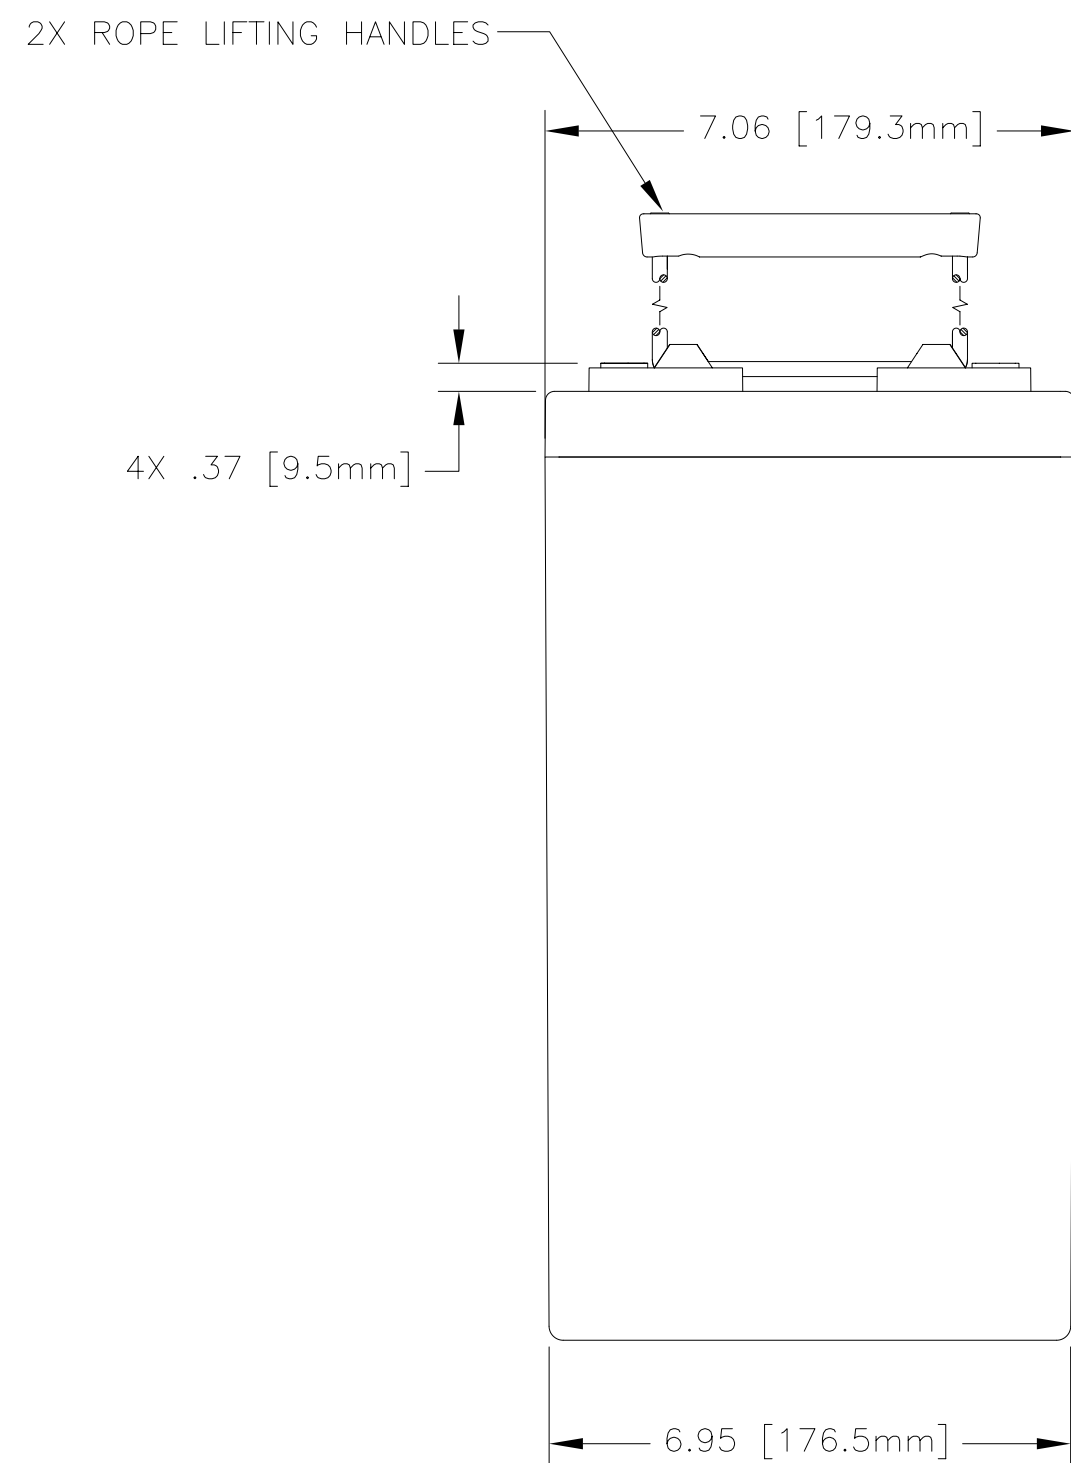


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00281 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWING ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM]
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CHANGED HANDLE DIRECTION	2/26/07	JBT
B	CHANGED COVER & HANDLE, NOM. WT. 94 lbs WAS 85 lbs	11/6/07	JBT

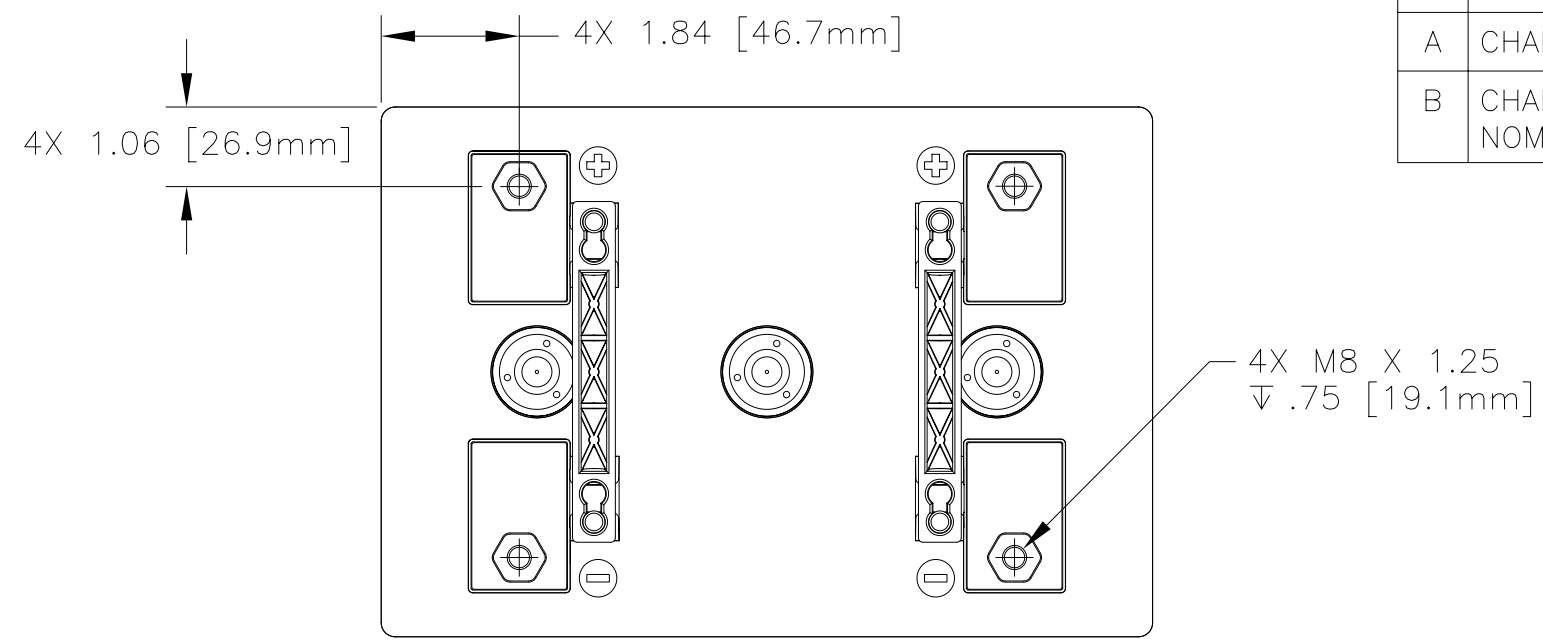

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-9150T
NOMINAL WEIGHT	94 LBS [42.6 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	915 AH

QTY	REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .12 ± 1° .XXX ± .060				CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
TREATMENT NONE				APPROVALS	DATE	TITLE
FINISH NONE				DRAWN D. AYALA	12/15/06	BATTERY, SLA, 2 VOLT, PVX-9150T
SIMILAR TO N/A				CHECKED AMIII	1/5/07	SIZE C
ACT WT N/A				APPROVED JBT	1/8/07	CAGE CODE 63017
CALC WT N/A				ISSUED NS	11/29/07	DWG NO. PVX-9150T
				SCALE 1=2.5		REV B
						SHEET 1 OF 1